

Avoiding Costs from Oversizing Data Center and Network Room Infrastructure

White Paper 37

Revision 7

by Neil Rasmussen

> Executive summary

The physical infrastructure of data centers and network rooms is typically oversized by five times the actual capacity at start-up and more than one and a half times the ultimate actual capacity. Oversizing statistics from actual customer installations are presented. The TCO costs associated with oversizing are quantified to be in excess of 30%. The fundamental reasons why oversizing occurs are discussed and an architecture and method for avoiding it is described.

Contents

Click on a section to jump to it

Introduction	2
Facts and statistics related to oversizing	2
Why does oversizing occur?	4
Fundamental reasons for oversizing	5
Architecture and method to avoid oversizing	6
Conclusion	9
Resources	10



877-393-1223 | www.p3-inc.com

Introduction

This paper will show that the single largest avoidable cost associated with typical data center and network room infrastructure is oversizing. The utilization of the physical and power infrastructure in a data center or network room is typically around 50-60%. The unused capacity of data centers and network rooms is an avoidable capital cost, and it also represents avoidable operating costs, including maintenance and energy.

This paper is constructed in three parts. First, the facts and statistics related to oversizing are described. Next, the reasons why this occurs are discussed. Finally, an architecture and method for avoiding these costs is described.

Facts and statistics related to oversizing

Anyone in the information technology or facilities business has seen unused data center space and observed unused power capacity or other underutilized infrastructure in data centers. In order to quantify this phenomenon, it is important to define the terms used for discussion.

Table 1 defines the terminology utilized in this paper:

Term	Definition
Design lifetime	The overall planned life of the data center. Typically 10-15 years.
Design capacity	The maximum IT load the data center is ultimately capable of supporting. All or part of the power and cooling equipment needed to provide this capacity may be installed at start-up.
Installed capacity	The load capability of the power and cooling equipment installed. Equal to or less than the design capacity.
Expected load	The estimated IT load at the commissioning of the system and over its lifetime. This typically changes with time and increases from time of commissioning.
Actual load	The actual IT load at the commissioning of the system and over its lifetime. This typically changes with time and increases from time of commissioning.

Table 1

Definitions related to oversizing

Modeling assumptions

In order to collect and analyze data related to oversizing, Schneider Electric surveyed users and developed a simplified model to describe infrastructure capacity plans for data centers. The model assumes:


- that the design life of a data center is 10 years
- that a data center plan has an ultimate design capacity and an estimated (expected) start-up IT load requirement

- that in the typical lifecycle of a data center the expected load is estimated to increase linearly from an expected start-up load to the expected final value, halfway through its expected lifecycle

The model as defined above gives rise to the planning model shown in **Figure 1**. This is assumed to be a representative model for how systems are planned.

Figure 1

Design capacity and expected load requirement over the lifetime of a data

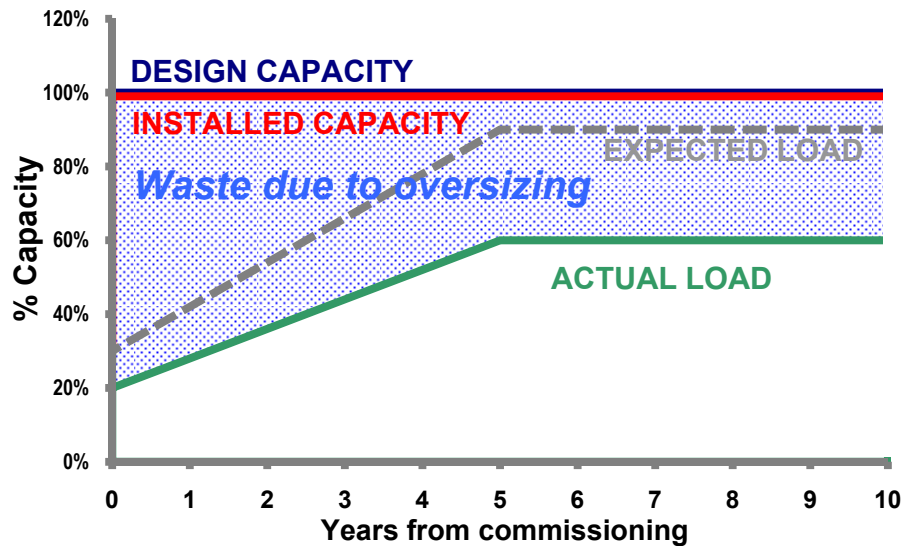

The figure shows a typical planning cycle. The installed capacity of the power and cooling equipment installed is equal to the design capacity. In other words the system is completely built-out from the beginning. The plan is that the expected load of the data center or network room load will start at 30% and ramp up to a final expected load value. However, the actual start-up load is typically lower than the expected start-up load, and it ramps up to an ultimate actual load, which can be considerably less than the installed capacity (note that the nameplate power capacity of the actual equipment installed may be larger than the installed capacity due to redundancy or user-desired de-rating margins).

[Link to resource](#)
White Paper 143
Data Center Projects: Growth Model

White Paper 143, *Data Center Projects: Growth Model*, goes into greater detail of the planning of data centers and the key elements of an effective growth plan strategy.

Data from actual installations

To understand the actual degree of oversizing in real installations, Schneider Electric collected data from many customers. This data was obtained by a survey of actual installations and through customer interviews. It was found that the start-up *expected* load is typically 30% of the ultimate design capacity and that the ultimate *expected* load is typically 80-90% of the ultimate design capacity (allowing for a safety margin). It was further found that the start-up *actual* load is typically 20% of the ultimate design capacity, and that the ultimate *actual* load is typically about 60% of the design capacity. This data is summarized in **Figure 1**. The average data center is ultimately oversized by over 1 ½ times its design value. At commissioning, the oversizing is even more dramatic, typically on the order of 5 times.

Excess costs associated with oversizing

The lifecycle costs associated with oversizing can be separated into two parts: the capital costs and the operating costs.

The excess cost associated with capital is indicated by the shaded area of **Figure 1**. The shaded area represents the fraction of the system design capacity that is not utilized in an average installation. The excess capacity translates directly to excess capital costs. The excess capital costs include the costs of the excess power and cooling equipment, as well as capitalized design and installation costs including wiring and ductwork.

The power and cooling systems in a typical 100 kW data center have a capital cost on the order of \$870,000 or \$8.70 per Watt. This analysis indicates that on the order of 40% or \$344,000 of this investment is wasted. In the early years, this waste is even greater. When the time-cost of money is figured in, the typical loss due to oversizing is nearly 50% of the entire capital cost of the data center! That is, the interest alone on the original capital is capable of paying for almost half of the actual capital requirement.

The excess lifecycle costs associated with oversizing also include the expenses of operating the facility. These costs include maintenance contracts, consumables, and electricity. Annual maintenance costs are typically about 10% of the system costs (capex), so over the lifetime, can be almost as much as the capital cost of a data center or network room, when the equipment is maintained per the manufacturers' instructions. Since oversizing gives rise to underutilized equipment that must be maintained, a large fraction of the maintenance costs are wasted. In the case of the 100 kW data center example, this wasted cost is on the order of \$150,000 over the system lifetime.

Excess electricity costs are significant when data centers or network rooms are oversized. The idling loss of a data center or network room power system is on the order of 5% of the power rating. When cooling costs are factored in, this becomes 10%. For a 100 kW data center, oversized to typical values, the wasted electricity over the 10 year system lifetime is on the order of 1,500,000 kWh, equating to on the order of \$150,000.

The total excess costs over the lifetime of the data center or network room will on average be approximately 30% of the cost of the power and cooling infrastructure. This represents an entitlement that could theoretically be recovered if the infrastructure could adapt and change to meet the actual requirement.

For many companies the waste of capital and operating expense dollars becomes a lost opportunity cost, which can be many times larger than the out-of-pocket cost. For example, Internet hosting companies have failed when the unutilized capital tied up in one installation prevented its deployment in another opportunity.

The data indicates a very large and quite variable amount of oversizing of data center and network room infrastructure occurs in real installations. Naturally, the question arises as to whether this oversizing is planned and expected, whether it is due to faulty planning, or whether there are fundamental reasons why oversizing occurs.

Planned oversizing

Interviews with the managers of typical installations indicate that data centers are planned to meet the maximum future estimated power requirements of the load. The design capacity and installed capacity are made slightly larger than the ultimate expected load. Many customers have a standard practice of de-rating their power system and utilizing only a fraction, such as 80% or 90% of the rated capacity; this is done with the idea that operating the system at less than full power will maximize overall reliability.

Why does oversizing occur?

The practice of making the installed capacity larger than the ultimate expected load for a data center is reflected in **Figure 1**. This represents a planned and intentional form of oversizing. This type of oversizing is a form of underutilization although it is not the largest contributor to overall excess cost.

Planning process and defects

A number of assumptions regarding future requirements are incorporated into the typical data center and network room planning process:

- The cost of not providing sufficient capacity in the data center or network room is very high and must be eliminated.
- It is very costly to increase capacity partway through the data center or network room lifecycle with traditional equipment.
- The work associated with increasing data center or network room capacity during the lifecycle creates a large and unacceptable risk of creating downtime.
- All of the engineering and planning for the ultimate data center or network room capacity must be done up-front.
- The load requirement of the data center or network room will increase but this increase cannot be reliably predicted.

The result of these assumptions is that data centers or network room are often planned, engineered, and built out up-front to meet an unknown need, and the capacity of the data center or network room is planned conservatively to the high side of any reasonable growth scenario.

Fundamental reasons for oversizing

The planning process gives rise to plans that, on average, yield a very poor utilization as demonstrated by actual results and must be judged a failure on economic terms. Yet the above examination of the planning process does not yield any fundamental defect. This apparent contradiction can be reconciled by a closer study of the data and the process constraints. **Figure 2** shows the distribution of ultimate utilization fraction for actual installations, that is, the ultimate actual load divided by the ultimate installed capacity.

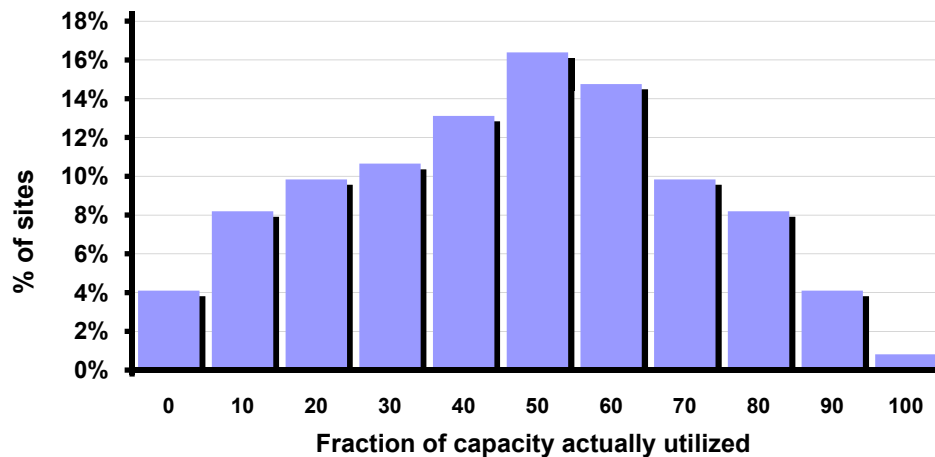


Figure 2
Ultimate utilization fraction of typical data centers

A study of this data provides the following insights:

- The expected value for the actual utilization fraction is approximately 50%.
- The expected value of surplus or unnecessary power capacity is 50%.

- The actual utilization fraction varies considerably, suggesting on average a very poor ability to predict the future during the design process.
- If the installed capacity were routinely set to the expected value of 50%, instead of the typical values chosen, then almost 40% of data centers would not be able to meet the load requirement during their lifetime.
- The current technique for sizing is a logical tradeoff where an oversized system protects against the high degree of variability in the ultimate actual load by reducing the likelihood that the system will fail to meet the load requirement during its lifetime.

The surprising conclusion is that given the constraints of many traditional designs and the unpredictability of the future IT load requirements, this method of planning data centers and network rooms is logical. If the cost to the business of creating a data center or network room that fails to meet the load requirement is high, then, given the conventional way of creating data centers and network rooms, the best way to minimize the overall expected cost of the system is to oversize it substantially.

Architecture and method to avoid oversizing

The fundamental uncertainty of future requirements during the planning process for data center and network room infrastructure is an insurmountable challenge that cannot be solved without predicting the future. Given this situation, the clear solution is to provide data center and network room infrastructure responsive to the unpredictable demand.

Barriers to adaptability

The question that naturally arises after a review of the magnitude of the oversizing problem is: Why is data center and network room infrastructure built out in advance rather than built out to track the actual load requirement?

In fact, many data centers do have some phased growth designed in. For example, the deployment of equipment racks is frequently phased. The deployment of the final leg of power distribution to the data center space is frequently phased. In some cases the deployment of a redundant UPS module may be phased. These approaches give rise to some savings in overall lifetime data center costs. However, in many cases the extra costs associated with installing this equipment later is much greater than if the equipment had been installed up-front, so that many planners choose to do a complete up-front installation. Therefore in practice only a small amount of the cost savings entitlement is obtained.

Method and approach to creating adaptable infrastructure

The ideal situation is to provide a method and architecture that can continuously adapt to changing requirements. Such a method and architecture would have the following attributes:

- The one-time engineering associated with the data center and network room design would be reduced.
- The data center or network room infrastructure would be provided in pre-engineered modular building blocks.
- Components could be wheeled in through common doorways and passenger elevators and plugged in without the need for performing wiring operations on live circuits.
- Special site preparation such as raised floors would be reduced.
- The system would be capable of operating in N, N+1, or 2N configurations without modification.
- Installation work such as wiring, drilling, and cutting would be greatly reduced.


- Special permitting or regulatory procedures would not be required in order to increase capacity.
- The equipment cost of the modular system would be the same or less than the cost of the traditional centralized system.
- The maintenance cost of the modular system would be the same or less than the cost of the traditional centralized system.

Practical and achievable levels of adaptability


When an adaptable physical infrastructure system is deployed, the waste due to oversizing shown as the shaded area of prior **Figure 1** can be reduced substantially. This savings is shown in **Figure 3**.

Figure 3

Design power capacity and requirement over the lifetime of a data center

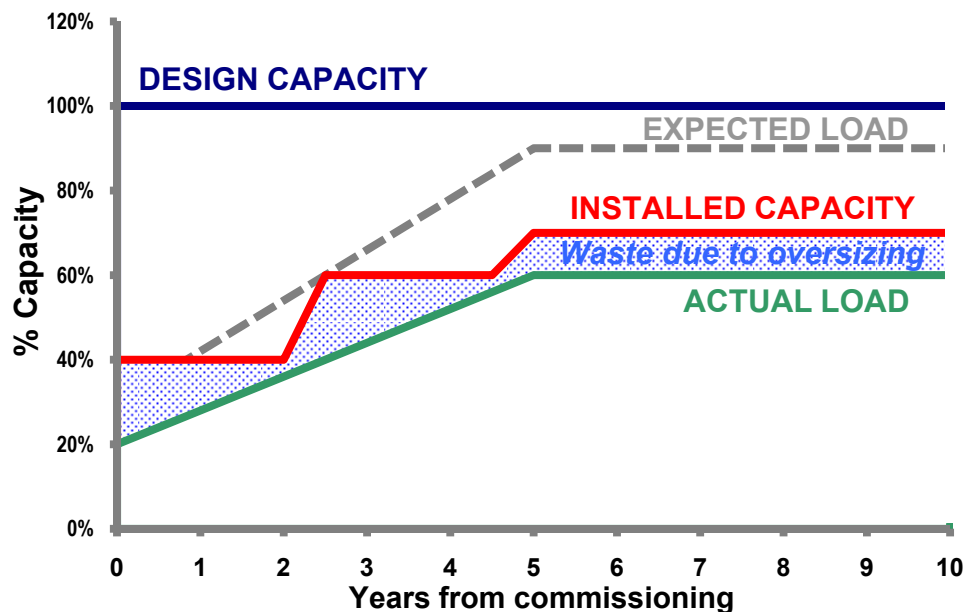

Note that the installed capacity is not built out to the room capacity at start-up and that the installed capacity changes to track the actual load. This figure should be contrasted with the scenario described by prior **Figure 1**.


 [Link to resource](#)
TradeOff Tool 8
Data Center Design Planning Calculator

TradeOff Tool 8, *Data Center Design Planning Calculator*, helps key decision makers analyze the effects of modularity as well as evaluate tradeoffs of other design attributes, and make decisions to avoid costly mistakes throughout the deployment phases of their data center. **Figure 4** illustrates an example of the output of the tool.

An example of an adaptable system meeting the requirements above is the Schneider Electric InfraStruxure™ architecture. A complete description of this system is not presented here. In the InfraStruxure architecture, over 70% of the power system can be deployed in a manner that tracks the growth of the data center or network room requirement. In practice, the parts of the power system that are generally completely deployed up-front are the main input switchgear, main power distribution panels, and the standby generator(s), which are sized to meet the ultimate design capacity. The UPS, battery system, power distribution units, bypass switchgear, and rack power distribution wiring are all deployed in a modular fashion in response to the changing load. An example of a cooling approach that can also scale as the load requirements increase is the Schneider Electric InRow™ cooling.

Figure 4

Screenshot of Data Center Design Planning Calculator

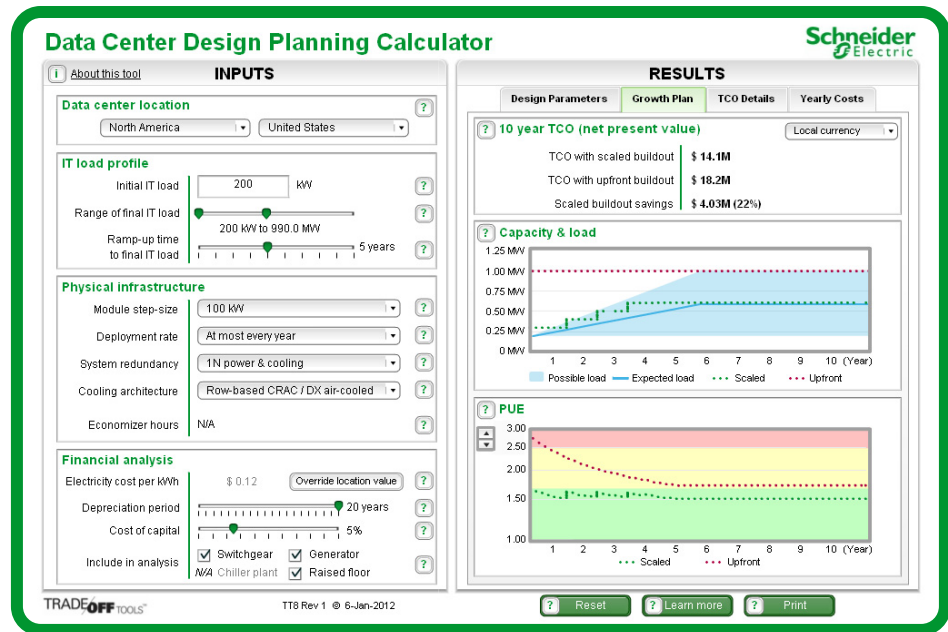

Link to resource
White Paper 163

Containerized Power and Cooling Modules for Data Centers

Some data center designers are going a step further with scalability by designing their facilities with containerized power and cooling plants. White Paper 163, *Containerized Power and Cooling Modules for Data Centers*, describes how these standardized, pre-assembled, and integrated data center facility modules are at least 60% faster to deploy in addition to providing first cost savings.

Link to resource
White Paper 164

TCO Analysis of Traditional vs. Scalable, Containerized Data Centers

White paper 164, *TCO Analysis of Traditional vs. Scalable, Containerized Data Centers*, further quantifies the savings that result from shifting from a traditional overbuilt data center to one built-out over time with scalable power and cooling facility modules.

Note that this discussion has focused on the attributes associated with the power and cooling systems, which are primary contributors to overall data center and network room infrastructure costs. The same analysis can and must be extended to comprehend the need for physical space, fire protection requirements, and security requirements in order to be complete.

Conclusion

Data centers and network rooms are routinely oversized to more than 1 ½ times their ultimate actual capacity. Oversizing drives excessive capital, maintenance, and energy expenses, on the order of 30%. This is a substantial fraction of the overall lifecycle cost. Most of this excess cost can be recovered by implementing a method and architecture that can adapt to changing requirements in a cost-effective manner while at the same time providing high availability.



About the author

Neil Rasmussen is a Senior VP of Innovation for Schneider Electric. He establishes the technology direction for the world's largest R&D budget devoted to power, cooling, and rack infrastructure for critical networks.

Neil holds 25 patents related to high-efficiency and high-density data center power and cooling infrastructure, and has published over 50 white papers related to power and cooling systems, many published in more than 10 languages, most recently with a focus on the improvement of energy efficiency. He is an internationally recognized keynote speaker on the subject of high-efficiency data centers. Neil is currently working to advance the science of high-efficiency, high-density, scalable data center infrastructure solutions and is a principal architect of the APC InfraStruXure system.

Prior to founding APC in 1981, Neil received his bachelors and masters degrees from MIT in electrical engineering, where he did his thesis on the analysis of a 200MW power supply for a tokamak fusion reactor. From 1979 to 1981 he worked at the MIT Lincoln Laboratory on flywheel energy storage systems and solar electric power systems.



Resources

Click on icon to link to resource



Data Center Projects: Growth Model

White Paper 143



Containerized Power and Cooling Modules for Data Centers

White Paper 163



TCO analysis of traditional vs. scalable containerized physical infrastructure for data centers

White Paper 164



Browse all white papers

whitepapers.apc.com



Data Center Design Planning Calculator

TradeOff Tool 8



Browse all TradeOff Tools™

tools.apc.com



www.p3-inc.com

OMAHA

1207 S. 75th Street
Omaha, NE 68124
402 393 1223 P
402 393 4779 F

KANSAS CITY

6603 A Royal
Pleasant Valley,
MO 64068
816 792 4641 P
816 792 4171 F

DES MOINES

4725 Merle Hay Rd.
Suite 105
Des Moines, IA 50322
515 277 5770 P
515 277 5771 F

ST. LOUIS

62 Soccer Park Rd.
Fenton, MO 63026
636 717 3422 P
636 717 3430 F



Contact us

For feedback and comments about the content of this white paper:

Data Center Science Center
DCSC@Schneider-Electric.com

If you are a customer and have questions specific to your data center project:

Contact your **Schneider Electric** representative at
www.apc.com/support/contact/index.cfm



877-393-1223 | www.p3-inc.com

An Introduction to P3 & PQU



Power Protection Products, Inc. (P3)

P3 is the industry's trusted and respected critical power, cooling and energy solutions provider.

P3 represents some of the biggest industry brands and strives to provide the top performing products. P3 stays on top of industry advances by participating in power quality studies, conferences and seminars with respect to data centers, power and loading analysis, transient voltage detection and power system harmonic analysis & mitigation, ground studies, and power monitoring systems.

P3 has designed and built a variety of data centers, IT expansion projects, wiring closet upgrades, and a host of product and equipment placements as well as provided equipment for a variety of colocation companies. We believe in providing a stable, secure IT environment to meet customers' needs.

Power Quality University

In addition to product sales, distribution, and marketing, P3 is also a leader in customer education through Power Quality University, which provides an educational environment for hands-on training, testing, and evaluation of today's power quality and data center solutions and equipment. The instructors who teach at PQU are highly qualified professionals and are all experts in the field. Upon completion of a PQU program, students can obtain Continuing Education Credits (CEU's). PQU is just one more way that P3 is affecting the electrical community in a positive way.



For more information about our power related products & services contact us at:

877-393-1223

Or visit our website.



www.p3-inc.com